


FM606

ROAD DISC CYCLECROSS GRAVEL MTB TRACK

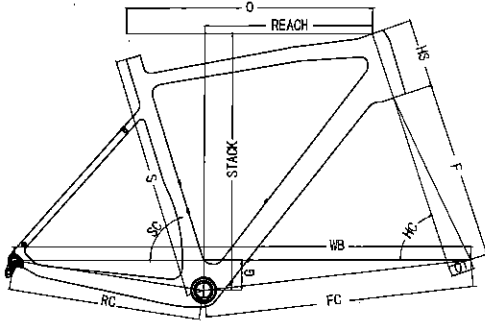


SIZE	S	O	SC	HS	HC	F	OT	WB	FC	RC	G	REACH	STACK
49	490	525	74.5°	120	70.5°	395	50	1024	598	435	69	375	538
52	520	535	74°	140	71°	395	50	1026	600	435	69	376	556
54	540	545	73.5°	150	71.5°	395	50	1027	601	435	69	377	568
56	560	560	73°	170	72°	395	50	1032	606	435	69	380	589
58	580	575	72.5°	190	72°	395	50	1042	616	435	69	383	606

Material CARBON
 Headset 1-1/8" 1-1/2"
 TIRE 700C*50mm / 27.5" *2.1"
 Weave UD
 BB BSA / PF30 / BB86

FM606

Highest modulus carbon fibre monocoque frame with internal cable routing.

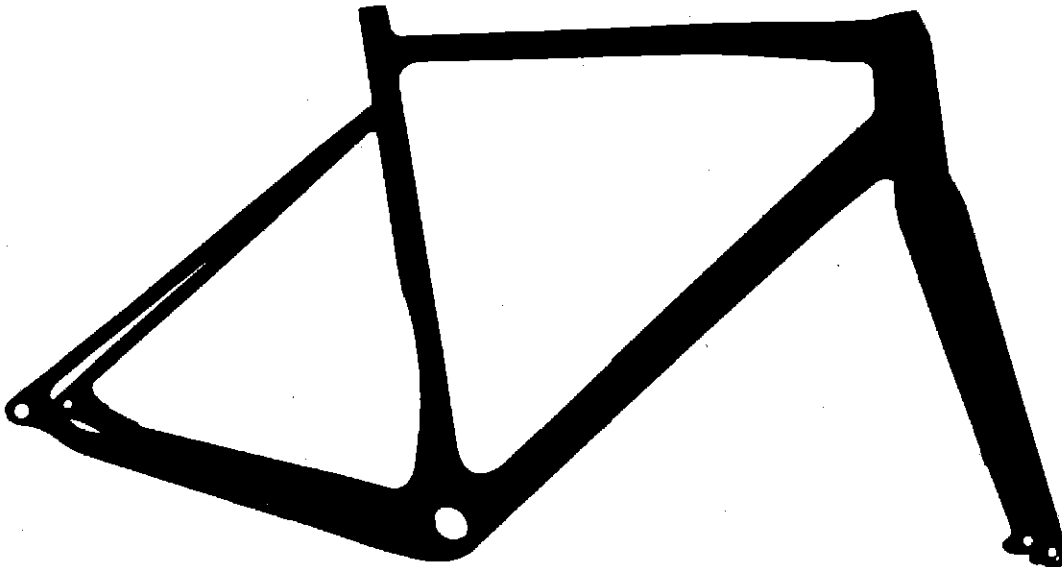



Sizes XS S M L XL



Full Carbon Monocoque Frame

Size Available 490/520/540/560/590
 Head Tube FSAACR(1-1/2")
 Seat Post Ø27.2 mm
 Bottom Bracket BSA/BB30/BB86
 Cable Routing Internal Cable Routing(For RB/FD/RD)
 Cable Plug Mechanical and D12(2 In 1)
 Tire Max 700*50C
 O.L.D TA Ø12*142mm
 Disc brake Flat mount 140mm or 160mm
 Max Chaining 50-34T
 Weight 1100g(For Size 520/BB86)
 ST062 Size 75/90/100/110/120/130

FK-TS075
Full Carbon
 Steerer Size 1 1/2"
 Steerer Length 300mm
 Integrated OD 57mm
 Offset 50mm
 O.L.D TA100mm
 Disc brake Flat mount 140mm or 160mm
 Weight 450g

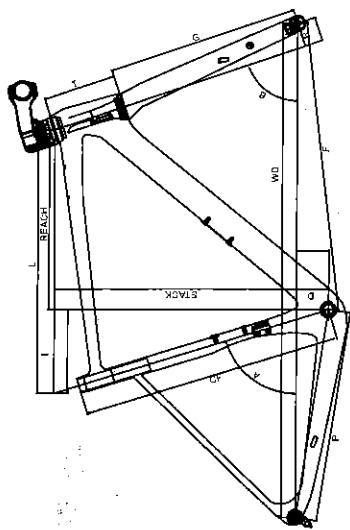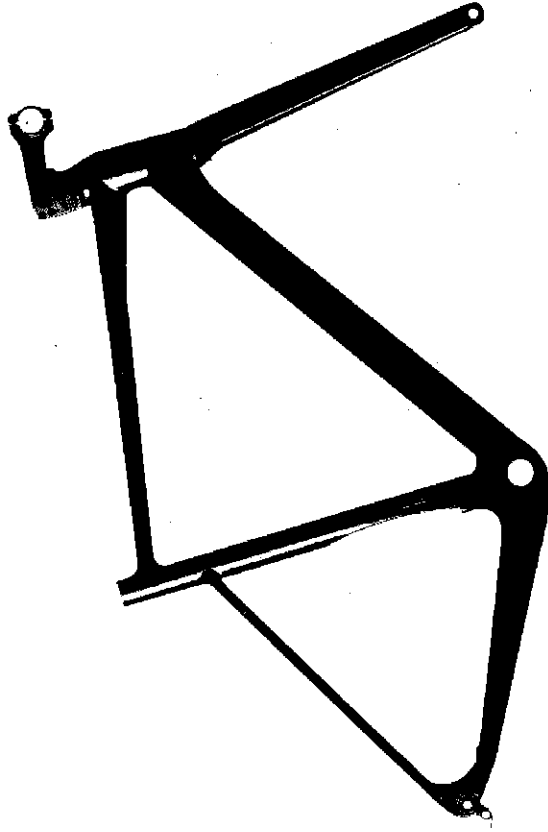

TSR075&FK-TS075&ST062

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	525	162	74°	70.5°	592	435	125	67	50	395	538	369	1018
520	520	555	167	73.5°	71°	593	435	140	57	50	395	556	370	1020
540	540	545	173.6	73°	71.5°	595.5	435	150	67	50	395	568	371.4	1021.7
560	560	560	177.49	72.5°	72°	601	435	170	67	50	395	589	374	1026
590	590	585	181.07	72.5°	72.5°	612	435	190	67	50	395	606	379	1034